



ARISTON

USER MANUAL

900 // SLIDEOUT HOOD

ARH9SIX

IMPORTANT // Please ensure that you read through this user manual prior to installation and use. This manual contains important information to ensure optimal performance and keep you safe. Please retain your proof of purchase, as this will be required in the event that you require warranty service. Remember to retain this manual for future reference.



www.aristonbrand.com



HELLO

**CONGRATULATIONS ON THE SELECTION OF THIS ARISTON APPLIANCE.
ARISTON APPLIANCES HAVE BEEN SPECIFICALLY DESIGNED FOR
AUSTRALIAN AND NEW ZEALAND KITCHENS.**

Please read through this user manual carefully as it contains information that will ensure that your appliance is installed correctly, important operating & care instructions and also some advice of what you need to do if this appliance is not performing as intended.




CONTENTS

HELLO	2
CONTENTS	3
WARNING & SAFETY INFORMATION	4
INSTALLATION & DUCTING	5
OPERATING INSTRUCTIONS	7
MAINTAINING YOUR RANGEHOOD	8
PRODUCT SPECIFICATION	9
PROOF OF PURCHASE	10
NOTES	11
CONTACT DETAILS	12


WARNING & SAFETY INFORMATION

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- The minimum distance between the hob surface and the lowest part of the rangehood is 600mm. This distance shall be at least 650mm, if the rangehood is installed over a gas hob. If the instructions for the gas hob specify a greater distance, this has to be taken into account.
- Young children should be supervised to ensure that they do not play with the appliance.
- Attention should be given to ensure that any applicable regulations concerning the discharge of exhaust air is fulfilled.
- There shall be adequate ventilation of the room when the rangehood is used at the same time as appliances burning gas or other fuels.
- If the supply cord of this equipment is damaged, it must only be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.
- You must read the details concerning the method and frequency of cleaning.
- This appliance has been designed for indoor domestic use only.
- There is a fire risk if cleaning is not carried out in accordance with the instructions.
- Do not remove or inspect the filters whilst the hood is in operation.
- Do not flambé under the rangehood.
- **CAUTION //** Accessible parts may become hot when used with cooking appliances
- Exhaust air must not be discharged into an existing flue which is used for exhausting fumes from appliances burning gas or other fuels.

INSTALLATION & DUCTING

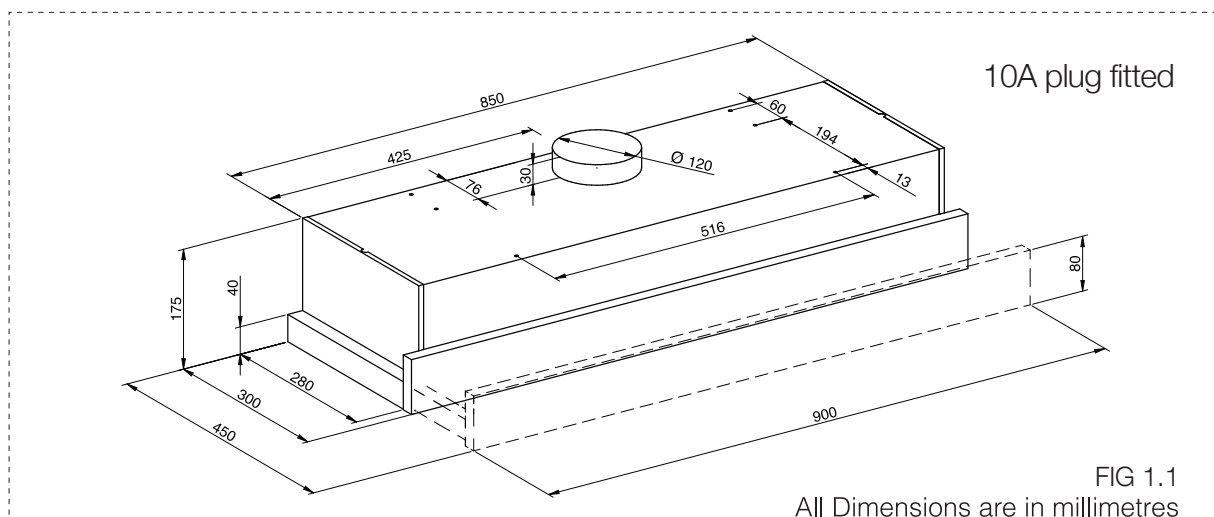

NOTICE // All measurements shown are to be used as a guide only, cutout dimensions should be taken from physical product.

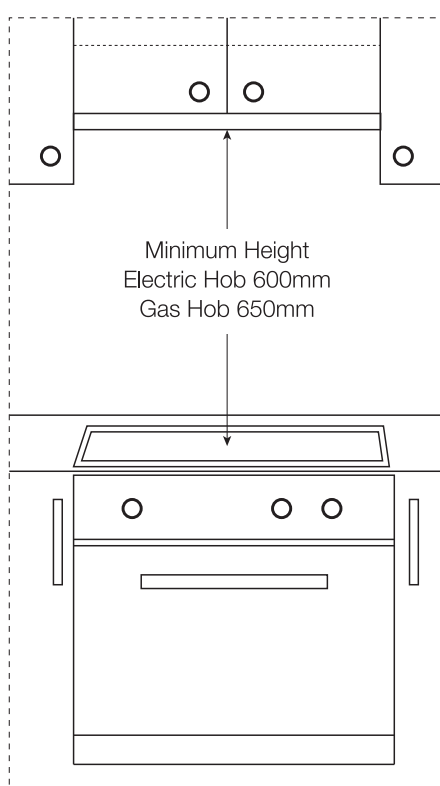


IMPORTANT // Before handling the rangehood during installation, it is recommended that you remove the filter to prevent damage.

Fig 1.2 illustrates the minimum height from the hob surface to the underside of the rangehood. Electric hob – 600mm, Gas hob - 650mm.

NOTICE // IF THE INSTRUCTIONS FOR THE GAS HOB SPECIFY A GREATER DISTANCE, THIS HAS TO BE OBSERVED. ANY INSTALLATION ABOVE 750MM WILL COMPROMISE PERFORMANCE.


FIG 1.2

INSTALLATION & DUCTING

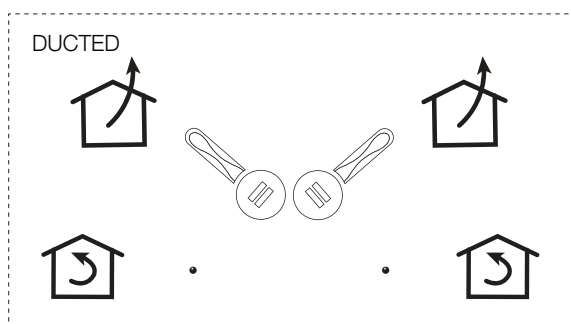

DUCTED OPTION

1. Remove the filter.
2. Make sure that internal switches are in ducted position. (see above)
3. Determine the most efficient path for the ductwork, minimise bends and keep the length of the ductwork to a minimum.
4. Before fixing the range hood, be sure to cut a hole to accommodate the 120mm ducting that you have selected.
5. It is important to run and finish all ducting (install roof / wall caps) prior to installation of the hood.
6. Remove the 120mm ducting cover plate and attach the ducting adaptor.
7. Drill 4 fixing holes as per the drawing. Ensure that access has been allowed for the power cable and plug.
8. Hold the hood up to the underside of the cabinet; align the 4 holes in the cabinet with the corresponding holes in the hood. Screw the 4 screws (max. length 30mm) from the cabinet side.
9. Attach the ducting adaptor to the ducting.
10. Re-install filter.
11. Plug in the power to the unit, turn on and test.

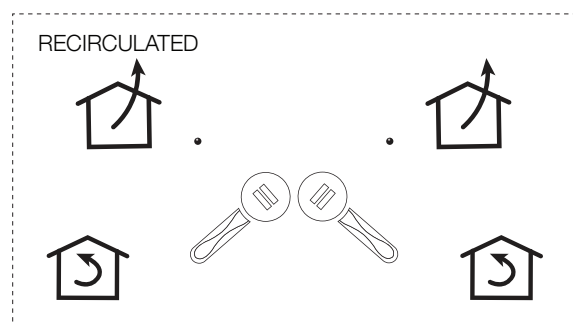


RE-CIRCULATING OPTION

1. Remove the filter.
2. Remove the front cover to expose the front vents. Do not remove the top 120mm outlet cover.
3. Make sure that internal switches are in recirculating position. (see above)
4. Drill 4 fixing holes as per the drawing. Ensure that access has been allowed for the power cable and plug.
5. Hold the hood up to the underside of the cabinet; align the 4 holes in the cabinet with the corresponding holes in the hood. Screw the 4 screws (max. length 30mm) from the cabinet side.
6. Re-install filter.
7. Plug in the power to the unit, turn on and test.


Notice // When the rangehood is re-circulating, carbon filters must be installed. This unit is pre-installed with a carbon filter.

WARNING // DO NOT penetrate any screws into the range hood as this may result in electrical hazards.

WARNING // Failure to install the screws or fixing device in accordance with these instructions may result in electrical hazards.

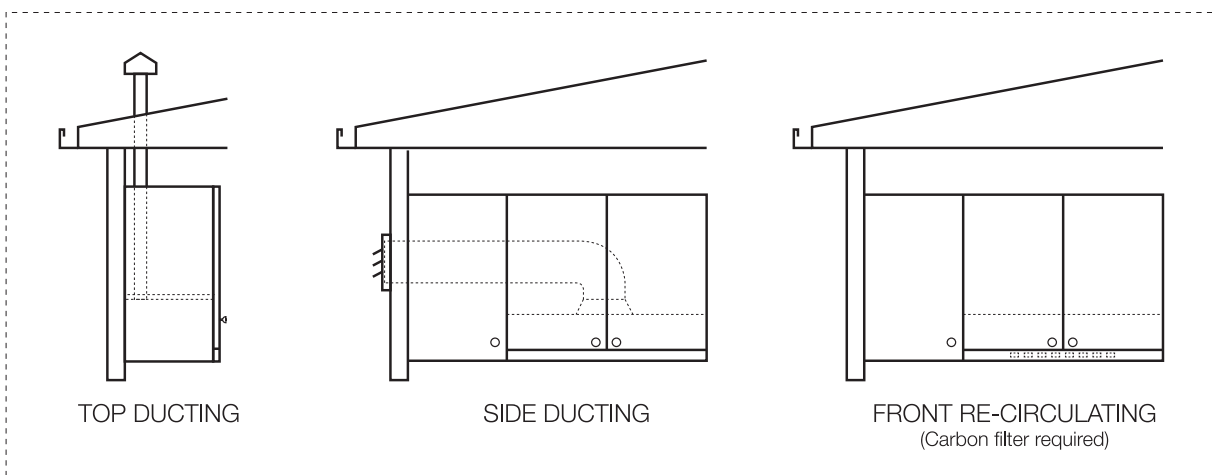

OPERATING INSTRUCTIONS

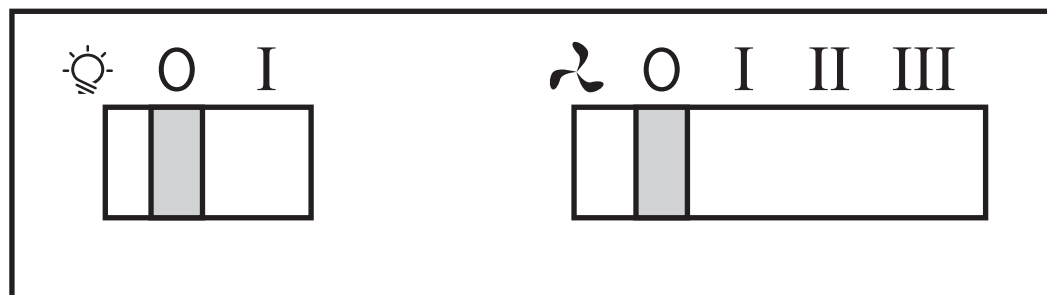

FAN SPEED

OFF/LOW/MEDIUM/HIGH SWITCH - located on the right hand side of the control panel.

This unit features 3 speed settings; single line indicates low speed, double lines indicate the medium speed & triple lines indicate high speed.

To turn the unit off, you can either slide the visor into the closed position or set the speed switch to the 0 position (off).

LIGHT

To turn the unit off, you can either slide the visor into the closed position or set the speed switch to the 0 position (off).





MAINTAINING YOUR RANGEHOOD

GENERAL MAINTENANCE

Ensure that the power to the unit is switched off prior to cleaning the unit. Surface should only be cleaned with a soft non-abrasive cloth moistened with warm soapy water. In coastal environments and humid areas more frequent cleaning is required to maintain the finish.

FILTERS

This unit is supplied with a carbon filter designed to eliminate odours from exhaust fumes. This filter cannot be cleaned and should be replaced every 3–6 months, dependant on use.

Aluminium filters may be ordered from your nearest service centre for ducted installations. Aluminium filters are dishwasher safe or can be cleaned with hot soapy water. Ensure that filters are thoroughly dry before re-installing.

The aluminum panels may alter in colour after several washes. This is not cause for concern nor replacement of panels.

LAMPS

Your rangehood is fitted with GU10 halogen lamps. Before replacing, ensure that lamps are completely cool and the power to the unit has been switched off. Replacement lamps can be purchased from your nearest service centre.

To remove the lamp, twist the lamp in an anti-clockwise direction. Be careful when installing the new lamp not to make contact with the skin as this may damage the lamp and shorten its life.



PRODUCT SPECIFICATION



MODEL: **ARH9SIX**

SERIAL:

220-240V ~ 50Hz

Lights 2 x 40W Max

Total: 280W

Motor: 2 x 100W



www.aristonbrand.com

Made in PRC

For service please call:

Australia: 1300 815 589

New Zealand: 09 306 1020





PROOF OF PURCHASE

ATTACH YOUR PROOF OF PURCHASE
FOR FUTURE REFERENCE



[illegible]

CONTACT DETAILS

AUSTRALIA

ARISIT PTY LIMITED
40-44 Mark Anthony Drive
Dandenong South, VIC 3175
Australia
Ph 1300 815 589
FX (03) 9768 0838
consumer.care@arisit.com

NEW ZEALAND

ARISIT PTY LIMITED
PO Box 68-140
Newton, Auckland
1145
New Zealand
Ph (09) 306 1020
FX (09) 302 0077
sales@aristonappliances.co.nz

ARISTON IS COMMITTED TO ONGOING RESEARCH AND DEVELOPMENT.
EVERY EFFORT HAS BEEN MADE TO ENSURE ALL INFORMATION IN THIS
USER MANUAL IS CORRECT AT TIME OF GOING TO PRINT.

DIMENSIONS SHOULD BE USED AS A REFERENCE ONLY AND ACTUAL
DIMENSIONS SHOULD BE TAKEN FROM THE PHYSICAL PRODUCT ONLY.

MANUFACTURER RESERVES THE RIGHT TO CHANGE SPECIFICATIONS
WITHOUT NOTICE

 aristonbrand.com

 **ARISTON**