

BCB 7030 F (AUS)

282L Integrated Fridge Freezer



 **ARISTON**



282L Integrated Fridge Freezer

Features and Benefits:

Holiday Mode	Uses less power by running minimal cooling cycles. This is ideal when you are away and the door is not being opened regularly.
Super Freezer	This will cool the cavity quickly. Perfect if you want something cooled quickly (such as drinks) or if you put items in that are not already chilled.
Open Door Signal	If you accidentally leave the door open the fridge will signal you to close the door making it more efficient and less likely for inconsistent temperatures to spoil foods quickly.
Frost Free Freezer	No need to defrost manually and scrape down ice, it will regularly run defrost cycles to prevent ice build up.

Distributed by Arisit Pty Ltd

40-44 Mark Anthony Drive, Dandenong South VIC 3175 Ph: 1300 762 219 Fax: 03 9768 0838 Website: www.arisit.com

1A Howe Street, Newton, Auckland NZ 1145

Ph:(09) 306 1020

Fax: (09) 302 0077

BCB 7030 F (AUS)

282L Integrated Fridge Freezer



LOCATION REQUIREMENTS


- It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.
- Do not install in a location where the temperature will fall below 55°F (13°C).
- Floor must support the refrigerator weight, more than 600 lbs (272 kg), door panels and contents of the refrigerator.

OPENING DIMENSIONS

This refrigerator is designed to be installed inside a frame that fits between kitchen cabinets. The inside of the frame should be a minimum of 69¹⁵/₁₆" (177.6 cm) high, 22¹/₁₆" (56.0 cm) wide, and 21⁷/₁₆" (55.5 cm) deep (front-to-back).


For proper ventilation, you must allow adequate unobstructed space behind the refrigerator and below and above the frame. Air enters below the refrigerator and exits above it.

- Allow a clearance minimum of 2" (50 mm) at the top of the frame.
- The minimum depth of the base of the frame is 20¹/₂" (520 mm) (front to back).
- The base can be as desired, but height should match height of toe kick of surrounding cabinets. A vent with an opening of at least 31 sq. in. (200 sq. cm) is required for proper ventilation.
- If the space between the top of the frame and the ceiling is open air, allow a minimum of 7⁷/₁₆" (20.0 cm) above the refrigerator.

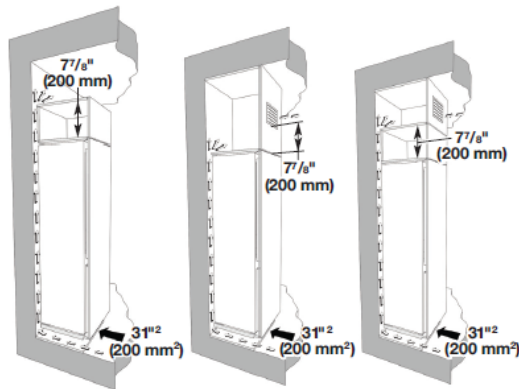

If the space between the top of the frame and the ceiling is enclosed as part of the surrounding cabinetry, a vent with an opening of at least 31 sq. in. (200 sq. cm) is required. The bottom of the vent must be a minimum of 7⁷/₁₆" (20.0 cm) above the refrigerator.

NOTE: Vent covers are not supplied with the unit.

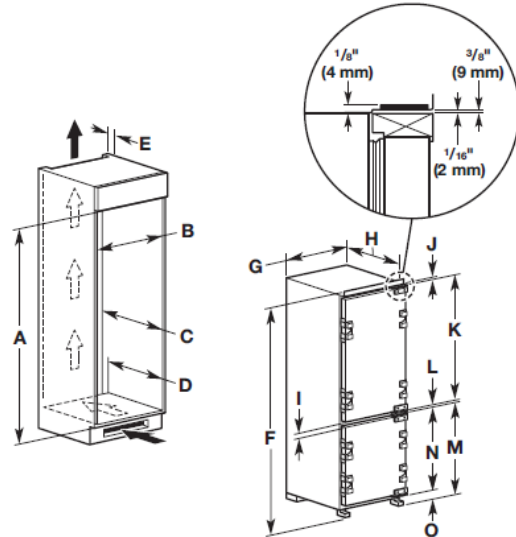

Dimension Table


A	70" (1776 mm)	I	2 ⁹ / ₁₆ " (60 mm)
B	22 ¹ / ₁₆ " (570 mm)	J	1/16" (2 mm)
C	minimum 21 ¹ / ₁₆ " (555 mm)	K	42" (1057 mm)
D	minimum 20 ⁷ / ₁₆ " (520 mm)	L	3/16" (10 mm)
E	minimum 2" min. (50 mm)	M	28" (703 mm)
F	69" (1770 mm)	N	26" (688 mm)
G	21 ¹ / ₄ " (540 mm)	O	1 ³ / ₁₆ " (30 mm)
H	21 ¹ / ₂ " (545 mm)		

Technical Specifications:

Total Capacity	282L (Gross)
Fridge	204L (Gross)
Freezer	78L
Display	Digital
Door Open Acoustic Signal	Y
Reversible Doors	Y
Extra Functions	Super Freeze / Holiday Mode

Energy Usage (Annual) / Star Rating	380kWh / A ++ / 2.5STAR
Voltage / Frequency (V/Hz)	220-240 / 50Hz
Absorbed Current (A)	1.35
Dimensions (W) x (H) x (D)	540 x 1770 x 545

WARNING: technical specifications and product sizes can be varied by the manufacturer, without notice. Cut outs for appliances should only be by physical product measurements. The above information is indicative only.



Distributed by Arisit Pty Ltd

40-44 Mark Anthony Drive, Dandenong South VIC 3175 Ph: 1300 762 219 Fax: 03 9768 0838 Website: www.arisit.com

1A Howe Street, Newton, Auckland NZ 1145 Ph:(09) 306 1020 Fax: (09) 302 0077